

Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.



Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 years, Standard Commercial

【Operating Temperature Range】

Nominal Operating Temperature: 25°C (77°F)
Discharge: -15°C ~ 50°C (5°F ~ 122°F)
Charge: -15°C ~ 40°C (5°F ~ 104°F)
Storage: -15°C ~ 40°C (5°F ~ 104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】

14.4 ~ 15.0 VDC/Unit at 25°C (77°F)


【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Design according with IEC 61056-1/2: 2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	34Ah@20HR-rate to 1.75V per cell @25°C (77°F)	
Weight	Approx. 10.48 Kg (23.10 lbs)	
Maximum Discharge Current	380A (5sec)	
Internal Resistance	Approx. 9.5 mΩ	
Short Circuit Current	915A	
Maximum Charge Current	10.20A	
Terminal types	B5 terminal to accept M6 bolt	
Terminal tightening torque	51.7±10.3 Kgf·cm / 44.9±9.0 Lbf·in / 5.10±1.0 N·m	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	195.6±2.0 mm 7.70±0.08inch
	Width (W)	130.0±1.5 mm 5.12±0.08inch
	Container Height (h)	154.8±2.0 mm 6.09±0.08inch
	Overall Height (H)	178.3±2.0 mm 7.02±0.08inch

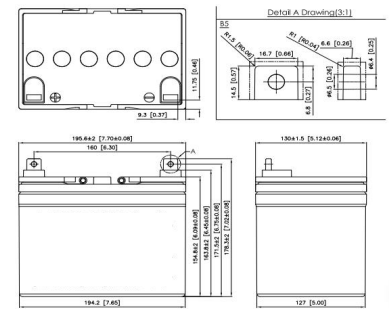

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	148	101	75.0	43.2	24.9	18.0	14.3	10.3	6.66	4.40	3.60	1.91
1.65V	134	95.5	72.8	42.6	24.7	17.9	14.2	10.2	6.62	4.37	3.58	1.90
1.70V	127	91.9	71.4	42.2	24.5	17.8	14.1	10.1	6.60	4.36	3.57	1.89
1.75V	112	84.2	67.9	41.1	24.1	17.6	14.0	10.0	6.54	4.33	3.55	1.88
1.80V	99.9	75.6	62.4	39.3	23.4	17.1	13.7	9.91	6.43	4.26	3.49	1.86
1.85V	84.3	68.4	55.5	36.8	22.1	16.3	13.1	9.52	6.18	4.10	3.36	1.79

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	1458	1057	822	517	302	217	172	123	79.4	52.6	43.1	23.0
1.65V	1339	1014	804	511	299	216	171	122	79.1	52.4	43.0	22.9
1.70V	1284	986	792	506	297	215	170	121	79.0	52.3	42.8	22.8
1.75V	1198	925	757	494	293	213	169	120	78.4	52.0	42.6	22.7
1.80V	1088	852	702	475	285	209	167	119	77.4	51.3	42.1	22.5
1.85V	950	786	639	448	268	199	161	115	74.8	49.7	40.8	21.8

Please refer to the official site for the latest rating confirmation.

Guang dong Xi shi Power Co.,Ltd

Tel: (总机) 020-84854238 Fax: 020-84854238

E-mail: csbusa@battery.com